



Container Details & Pictures

Dry Cargo Container

20' Steel Dry Cargo Container

Exterior			Interior		
Length	Width	Height	Length	Width	Height
20'0"	8'0"	8'6"	19'4 13/16"	7'8 19/32"	7'9 57/64"
6.058 m	2.438 m	2.591 m	5.898 m	2.352 m	2.385 m
Weight			Door Opening		
MGW	TARE	NET	Width	Height	
52,910 lb	5,140 lb	47,770 lb	7'-8 1/8"	7'-5 3/4"	
67,200 lb	5,290 lb	61,910 lb	2.343 m	2.280 m	
24,000 kg	2,330 kg	21,670 kg	CU.M	CU.FT	
30,480 kg	2,400 kg	28,080 kg	33.1	1,169	
Purpose					
1. Used for all kinds of general cargo.					
2. Captioned units (MGW 30,480 KG) can be coordinated from EMCU 3204073 and EISU 3568118.					



40' Steel Dry Cargo Container

Exterior			Interior		
Length	Width	Height	Length	Width	Height
40'0"	8'0"	8'6"	39'5 45/64"	7'8 19/32"	7'9 57/64"
12.192 m	2.438 m	2.591 m	12.032 m	2.352 m	2.385 m
Weight			Door Opening		
MGW	TARE	NET	Width	Height	
67,200 lb	8,820 lb	58,380 lb	7'-8 1/8"	7'-5 3/4"	
30,480 kg	4,000 kg	26,480 kg	2.343 m	2.280 m	
			CU.M	CU.FT	
			67.5	2,385	
Purpose					
Used for all kinds of general cargo.					



40' Hi-Cube Steel Dry Cargo Container


Exterior			Interior		
Length	Width	Height	Length	Width	Height
40'0"	8'0"	9'6"	39'5 45/64"	7'8 19/32"	8'9 15/16"
12.192 m	2.438 m	2.896 m	12.032 m	2.352 m	2.69 m
Weight			Door Opening		
MGW	TARE	NET	Width	Height	
67,200 lb	9,260 lb	57,940 lb	7'-8 1/8"	8'-5 49/64"	
30,480 kg	4,200 kg	26,280 kg	2.343 m	2.585 m	
			CU.M	CU.FT	
			76.2	2,690	
Purpose					
Used for all kinds of general cargo.					



45' Hi-Cube Steel Dry Cargo Container

Exterior			Interior		
Length	Width	Height	Length	Width	Height
45'0"	8'0"	9'6"	44'4"	7'6"	8'9 15/16"
13.716 m	2.438 m	2.896 m	13.556 m	2.352 m	2.698 m
Weight			Door Opening		
MGW	TARE	NET	Width	Height	
67,200 lb	10,580 lb	56,620 lb	7'8 1/8"	8'5 3/4"	
30,480 kg	4,800 kg	25,680 kg	2.340 m	2.585 m	
			CU.M	CU.FT	
			86.1	3,040	
Purpose					
Used for all kinds of general cargo.					



Exterior				
Length	Width	Height		
45'0"	8'0"	9'6"		
13.716 m	2.438 m	2.896 m		
Interior				
Length	Width	Height		
44'6"	7'7"	8'7"		
13.556 m	2.352 m	2.698 m		
Weight			Door Opening	
MGW	TARE	NET	Width	Height
67,200 lb	10,858 lb	56,342 lb	7'8 1/8"	8'5 3/4"
			2.340 m	2.585 m
30,480 kg	4,870 kg	25,610 kg	CU.M	CU.FT
			86	3,040
Purpose				
Captioned units can be coordinated from EISU 804001-EISU 804500 and EMCU 801001-EMCU 80250.				

Exterior				
Length	Width	Height		
45'0"	8'0"	9'6"		
13.716 m	2.438 m	2.896 m		
Interior				
Length	Width	Height		
44'6"	7'7"	8'7"		
13.556 m	2.352 m	2.698 m		
Weight			Door Opening	
MGW	TARE	NET	Width	Height
71,650 lb	10,360 lb	61,290 lb	7'8"	8'6"
			2.340 m	2.585 m
32,500 kg	4,700 kg	27,800 kg	CU.M	CU.FT
			86	3,040
Purpose				
Captioned units can be coordinated from EISU 802001-EISU 804000.				

Refrigerated Container

20' M.G.S.S. Refrigerated Container

Exterior						
Length	Width	Height				
20'0"	8'0"	8'6"				
6.058 m	2.438 m	2.591 m				
Interior						
Length	Width	Height				
18' 17/32"	7'6 15/32"	7'5 39/54"				
5.5 m	2.298 m	2.276 m				
Nominal		Weight				
Cubic Capacity		MGW	TARE			
1006 cu.ft.		67,180 lb	6,700 lb			
		30,480 kg	3,040 kg			
		CU.M	CU.FT			
28.5 cu.m.		28.8	1,016			
Cooling capacity	Air exchange rate		Type	Temp. control precision		
w(kcal)/C(F)	CFM	cu.m/hr				
11,000(9,460)/1.7(35) 6,280(5,400)/-18(0)	0-106	0-180	MHI CPE14-2BAIIIIEU	+0.25C		
Purpose						
Used for all kinds of general cargo.						



20' Aluminum Refrigerated Container

Exterior						
Length	Width	Height				
20'0"	8'0"	8'6"				
6.058 m	2.438 m	2.591 m				
Interior						
Length	Width	Height				
17'- 9.15/16"	7'6"	7'3.63/64"				
5.543 m	2.286 m	2.235 m				
Nominal		Weight				
Cubic Capacity		MGW	TARE			
978.46 cu.ft.		52,800 lb	6,314 lb			
		24,000 kg	2,870 kg			
		CU.M	CU.FT			
27.72 cu.m.		27.72	978.46			
Cooling capacity	Air exchange rate		Type	Temp. control precision		
w(kcal)/C(F)	CFM	cu.m/hr				
11,000(9,460)/1.7(35) 6,280(5,400)/-18(0)	0-106	0-180	MHI CPE14-2BAIIIIEU			



40' M.G.S.S. Hi-Cube Refrigerated Container

Exterior					
Length	Width	Height			
40'0"	8'0"	9'6"			
12.192 m	2.438 m	2.896 m			
Interior					
Length	Width	Height			
37'11 55/64"	7'6 15/32"	8'4 5/32"			
11.579 m	2.298 m	2.544 m			
Nominal			Weight		
Cubic Capacity			MGW	TARE	
2,390 cu.ft.			74,960 lb	9,150 lb	
			34,000 kg	4,150 kg	
67.70 cu.m.			CU.M	CU.FT	
			67.7	2,390	
Cooling capacity	Air exchange rate		Type	Temp. control precision	
w(kcal)/C(F)	CFM	cu.m/hr	MHI	+0.25C	
11,000(9,460)/1.7(35)	0-106	0-180	CPE16-2BAIIIIV		
6,280(5,400)/-18(0)					



40' Hi-Cube Aluminum Refrigerated Container

Exterior					
Length	Width	Height			
40'0"	8'0"	9'6"			
12.192 m	2.438 m	2.896 m			
Interior					
Length	Width	Height			
38'1 13/32"	7'6"	8'2 23/32"			
11.618 m	2.286 m	2.507 m			
Nominal			Weight		
Cubic Capacity			MGW	TARE	
2351 cu.ft.			67,200 lb	8,436 lb	
			30,480 kg	3,830 kg	
66.58 cu.m.			CU.M	CU.FT	
			66.6	2,351	
Cooling capacity	Air exchange rate		Type	Temp. control precision	
CFM	cu.m/hr	w(kcal)/C(F)	Paul Klinge	+0.25C	
9,011(7,750)/1.7(35)	0-180	0-305	TNE-406		
4,825(4,150)/-17.8(0)			MHI	+0.25C	
11,000(9,460)/1.7(35)	0-106	0-180	CPE14-2BAIIIA/ES		
6,280(5,400)/-18(0)					



Special Container

20' Full Height Open Top Container

Exterior				
Length	Width	Height		
19'10 1/2"	8'0"	8'6"		
6.058 m	2.438 m	2.591 m		
Interior				
Length	Width	Height		
19'4 13/64"	7'8 19/32"	7'7 11/16"		
5.898 m	2.352 m	2.329 m		
Weight			Door Opening	
MGW	TARE	NET	Width	Height
52,910 lb	5,310 lb	47,600 lb	7'8 1/4"	7'4 31/32"
24,000 kg	2,410 kg	21,590 kg	2.343 m	2.260 m
CU.M			CU.FT	
32.5			1,148	
Purpose				
Captioned units can be coordinated from UGMU 490001-UGMU 490150 and EMCU 460161-EMCU 460520.				



Exterior				
Length	Width	Height		
20'0"	8'0"	8'6"		
6.058 m	2.438 m	2.591 m		
Interior				
Length	Width	Height		
19'4 4/5"	7'8 4/5"	7'8 3/5"		
5.898 m	2.352 m	2.348 m		
Weight				
MGW	TARE	NET		
67,200 lb	5,140 lb	62,060 lb		
30,480 kg	2,330 kg	28,150 kg		
Purpose				
Captioned units can be coordinated from EISU 460001 to EISU 460400.				



20' Flat Rack Container with Four Freestanding Posts

Exterior				
Length	Width	Height		
20'0"	8'0"	8'6"		
6.058 m	2.438 m	2.591 m		
Interior				
Length	Width	Height		
18'6 7/16"	6'7 59/64"	6'9 39/64"		
5.650 m	2.030 m	2.073 m		
Weight				
MGW	TARE	NET		
66,140 lb	6,150 lb	59,990 lb		
30,000 kg	2,790 kg	27,210 kg		
Purpose				
Captioned units can be coordinated from EMCU 760321-EMCU 760520				



20' Flat Rack Container with Collapsible End

Exterior		
Length	Width	Height
20'0"	8'0"	8'6"
6.058 m	2.438 m	2.591 m
Interior		
Length	Width	Height
18'5 31/32"	7'3 23/32"	7'3 59/64"
5.638 m	2.228 m	2.233 m
Weight		
MGW	TARE	NET
74,950 lb	6,370 lb	68,580 lb
34,000 kg	2,890 kg	31,110 kg



Purpose

Captioned units can be coordinated from EISU 750000 to EISU 750300

20' Fuel Tank Container

Exterior		
Length	Width	Height
20'0"	8'0"	8'6"
6.058 m	2.438 m	2.591 m
Weight		
MGW	TARE	NET
36,000 kg	3,385 kg	32,615 kg



Capacity

24,000 litres

Design Temp.

-20°C to 130°C

Purpose

Captioned units can be coordinated from EISU 8010010 to EISU 8010453, and are need for power pack generators equipped on group vessels, not for export or import purpose.

20' Power Pack Generator Container

Exterior		
Length	Width	Height
20'0"	8'0"	8'6"
6.058 m	2.438 m	2.591 m
Interior		
Length	Width	Height
19'4 13/16"	7'8 19/32"	7'9 57/64"
5.898 m	2.352 m	2.385 m
Weight		
MGW	TARE	MACHINE
8,500 kg	2,400 kg	6,100 kg



Power Supply

450 kw

Socket

40

Purpose

Captioned units can be coordinated from EMCU 0000013 to EMCU 0000409.

40' Flat Rack Container with Four Rreestanding Posts

Exterior		
Length	Width	Height
40'0"	8'0"	8'6"
12.192 m	2.438 m	2.591 m



Kun Lun Shan Zhuang Residence Area, #1945
Phone +86-5

Interior		
Length	Width	Height
38'7 15/16"	6'7 59/64"	6'4 1/2"
11.784 m	2.030 m	1.943 m
Weight		
MGW	TARE	NET
99,210 lb	11,908 lb	87,302 lb
45,000 kg	5,400 kg	39,600 kg

Purpose

Captioned units can be coordinated from EMCU 700251-EMCU 700450.

40' Flat Rack Container with Collapsible End

Exterior		
Length	Width	Height
40'0"	8'0"	8'6"
12.192 m	2.438 m	2.591 m
Interior		
Length	Width	Height
38'7 39/64"	7'3 23/32"	6'4 61/64"
11.752 m	2.374 m	1.955 m
Weight		
MGW	TARE	NET
99,210 lb	10,800 lb	89,410 lb
45,000 kg	4,900 kg	40,100 kg



Purpose

Captioned units can be coordinated from UGMU 707001-UGMU 707050; EISU 710000-EISU 710500.

40' Full Height Open Top Container

Exterior		
Length	Width	Height
40'0"	8'0"	8'6"
12.192 m	2.438 m	2.591 m
Interior		
Length	Width	Height
39'7"	7'8 9/10"	7'8 3/5"
12.032 m	2.352 m	2.348 m
Weight		
MGW	TARE	NET
67,200 lb	9,499 lb	57,701 lb
30,480 kg	4,300 kg	26,180 kg
CU.M		CU.FT
65.9		2,327




Purpose

Captioned units can be coordinated from EMCU 400362-EMCU 400601, UGMU 407001-UGMU 407050 and EISU 400001-EISU 400600.

40' Hi-Cube Hanger Container

Exterior		
Length	Width	Height
40'0"	8'0"	9'6"
12.19 m	2.44 m	2.90 m
Interior		
Length	Width	Height
39'5 45/64"	7'8 19/32"	8'9 15/16"

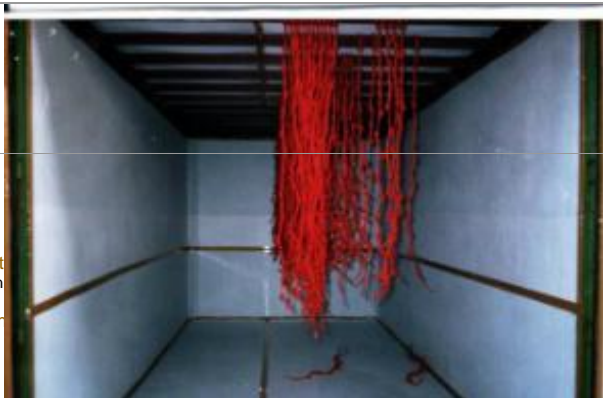

12.03 m	2.35 m	2.69 m		
Weight			Door Opening	
MGW	TARE	NET	Width	Height
67,200 lb	9,172 lb	58,028 lb	7'-8 1/8"	8'-5 49/64"
30,480 kg	4,200 kg	26,280 kg	2.343 m	2.585 m
Purpose				
Used for all kinds of garment.				

乾貨貨櫃


二十呎鋼製乾貨貨櫃

外部尺寸		
長	寬	高
20'0"	8'0"	8'6"
6.058 m	2.438 m	2.591 m
內部尺寸		
長	寬	高
19'4 13/16"	7'8 19/32"	7'9 57/64"



5.898 m	2.352 m	2.385 m	櫃門內徑	
重量限制			寬	高
總重	空櫃重	貨物淨重	7'-8 1/8"	7'-5 3/4"
52,910 lb	5,140 lb	47,770 lb	2.343 m	2.280 m
67,200 lb	5,290 lb	61,910 lb	內容積 (立方呎)	
24,000 kg	2,330 kg	21,670 kg	內容積 (立方米)	
30,480 kg	2,400 kg	28,080 kg	33.1	1,169
附註				
上述資料僅供參考，實際尺寸及重量應以各櫃體所標示者為準。				

四十呎鋼製乾貨貨櫃

外部尺寸						
長	寬	高				
40'0"	8'0"	8'6"				
12.192 m	2.438 m	2.591 m				
內部尺寸						
長	寬	高				
39'5 45/64"	7'8 19/32"	7'9 57/64"				
12.032 m	2.352 m	2.385 m				
重量限制					櫃門內徑	
總重	空櫃重	貨物淨重			寬	高
67,200 lb	8,820 lb	58,380 lb	7'-8 1/8"	7'-5 3/4"		
30,480 kg	4,000 kg	26,480 kg	2.343 m	2.280 m		
			內容積 (立方呎)			
			內容積 (立方米)			
			67.5	2,385		
附註						
上述資料僅供參考，實際尺寸及重量應以各櫃體所標示者為準。						

四十呎超高鋼製乾貨貨櫃

外部尺寸						
長	寬	高				
40'0"	8'0"	9'6"				
12.192 m	2.438 m	2.896 m				
內部尺寸						
長	寬	高				
39'5 45/64"	7'8 19/32"	8'9 15/16"				
12.032 m	2.352 m	2.69 m				
重量限制					櫃門內徑	
總重	空櫃重	貨物淨重			寬	高
67,200 lb	9,260 lb	57,940 lb	7'-8 1/8"	8'-5 49/64"		
30,480 kg	4,200 kg	26,280 kg	2.343 m	2.585 m		
			內容積 (立方呎)			
			內容積 (立方米)			
			76.2	2,690		
附註						
上述資料僅供參考，實際尺寸及重量應以各櫃體所標示者為準。						

四十五呎超高鋼製乾貨貨櫃

外部尺寸				
長	寬	高		
45'0"	8'0"	9'6"		
13.716 m	2.438 m	2.896 m		
內部尺寸				
長	寬	高		
44'4"	7'6"	8'9 15/16"		

13.556 m	2.352 m	2.698 m	櫃門內徑	
重量限制			寬	高
總重	空櫃重	貨物淨重	7'8 1/8"	8'5 3/4"
67,200 lb	10,580 lb	56,620 lb	2.340 m	2.585 m
30,480 kg	4,800 kg	25,680 kg	內容積 (立方米)	內容積 (立方呎)
			86.1	3,040
附註				
上述資料僅供參考，實際尺寸及重量應以各櫃體所標示者為準。				

外部尺寸						
長	寬	高				
45'0"	8'0"	9'6"				
13.716 m	2.438 m	2.896 m				
內部尺寸						
長	寬	高				
44'4"	7'6"	8'9 15/16"				
13.556 m	2.352 m	2.698 m				
重量限制					櫃門內徑	
總重	空櫃重	貨物淨重			寬	高
67,200 lb	10,858 lb	56,342 lb	7'8 1/8"	8'5 3/4"		
30,480 kg	4,870 kg	25,610 kg	2.340 m	2.585 m		
			內容積 (立方米)	內容積 (立方呎)		
			86	3,040		
附註						
EISU 804001-EISU 804500; EMCU 801001-EMCU 802500 上述資料僅供參考，實際尺寸及重量應以各櫃體所標示者為準。						

外部尺寸						
長	寬	高				
45'0"	8'0"	9'6"				
13.716 m	2.438 m	2.896 m				
內部尺寸						
長	寬	高				
44'6"	7'7"	8'7"				
13.556 m	2.352 m	2.698 m				
重量限制					櫃門內徑	
總重	空櫃重	貨物淨重			寬	高
71,650 lb	10,360 lb	61,290 lb	7'8"	8'6"		
32,500 kg	4,700 kg	27,800 kg	2.340 m	2.585 m		
			內容積 (立方米)	內容積 (立方呎)		
			86	3,040		
附註						
EISU 802001-EISU 804000 上述資料僅供參考，實際尺寸及重量應以各櫃體所標示者為準。						

冷凍貨櫃

二十呎鋼製冷凍貨櫃

外部尺寸			
長	寬	高	
20'0"	8'0"	8'6"	
6.058 m	2.438 m	2.591 m	
內部尺寸			
長	寬	高	
18' 17/32"	7'6 15/32"	7'5 39/54"	

Kun Lun Shan Zhuang Residence Area

Phone +86-532-86956731 Fax +86-532-86956732
www.bliinternational.com.

5.5 m	2.298 m	2.276 m	重量限制	
設計內部容積 (附註 1)			總重	空櫃重
1006 立方呎			67,180 lb	6,700 lb
			30,480 kg	3,040 kg
28.5 立方米			內容積 (立方米)	內容積 (立方呎)
			28.8	1,016
製冷能力		通風量		機型
瓦 (千卡) / 攝氏 (華氏)	立方呎 / 分	立方公尺 / 小時	設溫之容許誤差	
11,000(9,460)/1.7(35) 6,280(5,400)/-18(0)	0-106	0-180	MHI CPE14-2BAIIIIEU	+0.25C
附註				
1.此為設計內部容積，實際貨物裝載仍應低於櫃內貨物線，以利冷空氣循環。 2.上述資料僅供參考，實際尺寸及重量應以各櫃櫃體所標示者為準。 3.上述所列機型僅為圖片中所示者，其餘仍以各櫃所裝備之機型為準。				

二十呎鋁製冷凍貨櫃

外部尺寸				
長	寬	高		
20'0"	8'0"	8'6"		
6.058 m	2.438 m	2.591 m		
內部尺寸				
長	寬	高		
17'-9.15/16"	7'6"	7'3.63/64"		
5.543 m	2.286 m	2.235 m		
設計內部容積 (附註 1)			重量限制	
978.46 立方呎			總重	空櫃重
			52,800 lb	6,314 lb
27.72 立方米			24,000 kg	2,870 kg
			內容積 (立方米)	內容積 (立方呎)
			27.72	978.46
製冷能力		通風量		機型
瓦 (千卡) / 攝氏 (華氏)	立方呎 / 分	立方公尺 / 小時	設溫之容許誤差	
11,000(9,460)/1.7(35) 6,280(5,400)/-18(0)	0-106	0-180	MHI CPE14-2BAIIIIEU	+0.25C
附註				
1.此為設計內部容積，實際貨物裝載仍應低於櫃內貨物線，以利冷空氣循環。 2.上述資料僅供參考，實際尺寸及重量應以各櫃櫃體所標示者為準。 3.上述所列機型僅為圖片中所示者，其餘仍以各櫃所裝備之機型為準。				

四十呎超高鋼製冷凍貨櫃

外部尺寸				
長	寬	高		
40'0"	8'0"	9'6"		
12.192 m	2.438 m	2.896 m		
內部尺寸				
長	寬	高		
37'11 55/64"	7'6 15/32"	8'4 5/32"		
11.579 m	2.298 m	2.544 m		
設計內部容積 (附註 1)			重量限制	
2,390 立方呎			總重	空櫃重
			74,960 lb	9,150 lb
67.70 立方米			34,000 kg	4,150 kg
			內容積 (立方米)	內容積 (立方呎)

		67.7		2,390	
製冷能力		通風量		機型	
瓦 (千卡) / 攝氏 (華氏)		立方呎 / 立方公尺 / 分 / 時		MHI CPE16-2BAIII EV	
11,000(9,460)/1.7(35) 6,280(5,400)/-18(0)		0-106 0-180		+0.25C	
附註					
1.此為設計內部容積，實際貨物裝載仍應低於櫃內貨物線，以利冷空氣循環。					
2.上述資料僅供參考，實際尺寸及重量應以各櫃櫃體所標示者為準。					
3.上述所列機型僅為圖片中所示者，其餘仍以各櫃所裝備之機型為準。					

四十呎超高鋁製冷凍貨櫃

外部尺寸								
長	寬	高						
40'0"	8'0"	9'6"						
12.192 m	2.438 m	2.896 m						
內部尺寸								
長	寬	高						
38'1 13/32"	7'6"	8'2 23/32"						
11.618 m	2.286 m	2.507 m						
設計內部容積 (附註 1)						重量限制		
2351 立方呎						總重	空櫃重	
66.58 立方米			67,200 lb 30,480 kg	8,436 lb 3,830 kg				
			內容積 (立方米)	內容積 (立方呎)				
			66.6	2,351				
製冷能力		通風量		機型				
瓦 (千卡) / 攝氏 (華氏)		立方呎 / 立方公尺 / 分 / 時		Paul Klinge TNE-406				
9,011(7,750)/1.7(35) 4,825(4,150)/-17.8(0)		0-180 0-305		+0.25C				
11,000(9,460)/1.7(35) 6,280(5,400)/-18(0)		0-106 0-180		MHI CPE14-2BAIII A/ES				
				+0.25C				
附註								
1.此為設計內部容積，實際貨物裝載仍應低於櫃內貨物線，以利冷空氣循環。								
2.上述資料僅供參考，實際尺寸及重量應以各櫃櫃體所標示者為準。								
3.上述所列機型僅為圖片中所示者，其餘仍以各櫃所裝備之機型為準。								

特殊貨櫃

二十呎全高開頂貨櫃

外部尺寸								
長	寬	高						
19'10 1/2"	8'0"	8'6"						
6.058 m	2.438 m	2.591 m						
內部尺寸								
長	寬	高						
19'4 13/64"	7'8 19/32"	7'7 11/16"						
5.898 m	2.352 m	2.329 m						
重量限制						櫃門內徑		

總重	空櫃重	貨物淨重	寬	高
52,910 lb	5,310 lb	47,600 lb	7'8 1/4"	7'4 31/32"
24,000 kg	2,410 kg	21,590 kg	2.343 m	2.260 m
內容積 (立方米)			內容積 (立方呎)	
32.5			1,148	
附註				
UGMU 490001-UGMU 490100; EMCU 460161-EMCU 460520 上述資料僅供參考，實際尺寸及重量應以各櫃櫃體所標示者為準。				

外部尺寸								
長	寬	高						
20'0"	8'0"	8'6"						
6.058 m	2.438 m	2.591 m						
內部尺寸								
長	寬	高						
19'4 4/5"	7'8 4/5"	7'8 3/5"						
5.898 m	2.352 m	2.348 m						
重量限制						櫃門內徑		
總重	空櫃重	貨物淨重				寬	高	
67,200 lb	5,140 lb	62,060 lb	7'8 3/10"	7'6"				
30,480 kg	2,330 kg	28,150 kg	2.340 m	2.280 m				
內容積 (立方米)			內容積 (立方呎)					
32.5			1,150					
附註								
EISU 460001-EISU 460400 上述資料僅供參考，實際尺寸及重量應以各櫃櫃體所標示者為準。								

二十呎角柱可折疊式之床式、平台兩用貨櫃

外部尺寸					
長	寬	高			
20'0"	8'0"	8'6"			
6.058 m	2.438 m	2.591 m			
內部尺寸					
長	寬	高			
18'6 7/16"	6'7 59/64"	6'9 39/64"			
5.650 m	2.030 m	2.073 m			
重量限制					
總重	空櫃重	貨物淨重			
66,140 lb	6,150 lb	59,990 lb			
30,000 kg	2,790 kg	27,210 kg			
附註					
EMCU 760321-EMCU 760520 上述資料僅供參考，實際尺寸及重量應以各櫃櫃體所標示者為準。					

二十呎前後板櫃可折疊式之床式、平台兩用貨櫃

外部尺寸					
長	寬	高			
20'0"	8'0"	8'6"			
6.058 m	2.438 m	2.591 m			
內部尺寸					
長	寬	高			
18'5 31/32"	7'3 23/32"	7'3 59/64"			
5.638 m	2.228 m	2.233 m			
重量限制					
總重	空櫃重	貨物淨重			
74,950 lb	6,370 lb	68,580 lb			
34,000 kg	2,890 kg	31,110 kg			
附註					
EISU 750000-EISU 750300 上述資料僅供參考，實際尺寸及重量應以各櫃櫃體所標示者為準。					

二十呎油槽櫃

外部尺寸		
長	寬	高
20'0"	8'0"	8'6"
6.058 m	2.438 m	2.591 m
重量限制		
總重	空櫃重	貨物淨重
36,000 kg	3,385 kg	32,615 kg
容量		工作溫度
24,000 litres		-20°C to 130°C
用途		
上述油槽櫃僅用於集團屬輪上，做為貨櫃式發電機之供油使用，不對外營運。		



二十呎貨櫃式發電機櫃

外部尺寸		
長	寬	高
20'0"	8'0"	8'6"
6.058 m	2.438 m	2.591 m
內部尺寸		
長	寬	高
19'4 13/16"	7'8 19/32"	7'9 57/64"
5.898 m	2.352 m	2.385 m
重量限制		
總重	空櫃重	貨物淨重
8,500 kg	2,400 kg	6,100 kg
供電量		插座數
450 kw		40
用途		
上述發電機僅用於集團屬輪上，供應冷凍櫃插電使用，不對外營運。		




四十呎角柱可折疊式之床式、平台兩用貨櫃

外部尺寸		
長	寬	高
40'0"	8'0"	8'6"
12.192 m	2.438 m	2.591 m
內部尺寸		
長	寬	高
38'7 15/16"	6'7 59/64"	6'4 1/2"
11.784 m	2.030 m	1.943 m
重量限制		
總重	空櫃重	貨物淨重
99,210 lb	11,908 lb	87,302 lb
45,000 kg	5,400 kg	39,600 kg
附註		
EMCU 700251-EMCU 700450 上述資料僅供參考，實際尺寸及重量應以各櫃櫃體所標示者為準。		



四十呎前後板框可折疊式之床式、平台兩用貨櫃

外部尺寸		
長	寬	高
40'0"	8'0"	8'6"
12.192 m	2.438 m	2.591 m
內部尺寸		
長	寬	高
38'7 39/64"	7'3 23/32"	6'4 61/64"
11.752 m	2.374 m	1.955 m
重量限制		
總重	空櫃重	貨物淨重
99,210 lb	10,800 lb	89,410 lb
45,000 kg	4,900 kg	40,100 kg



附註
UGMU 707001~UGMU 707050; EISU 710000~EISU 710500
上述資料僅供參考，實際尺寸及重量應以各櫃櫃體所標示者為準。


外部尺寸		
長	寬	高
40'0"	8'0"	8'6"
12.192 m	2.438 m	2.591 m
內部尺寸		
長	寬	高
39'7"	7'8 9/10"	7'8 3/5"
12.032 m	2.352 m	2.348 m
重量限制		
總重	空櫃重	貨物淨重
67,200 lb	9,499 lb	57,701 lb
30,480 kg	4,300 kg	26,180 kg
內容積 (立方米)		內容積 (立方呎)
65.9		2,327



附註
EMCU 400362~EMCU 400601; UGMU 407001~UGMU 407050; EISU4 00001~EISU 400600
上述資料僅供參考，實際尺寸及重量應以各櫃櫃體所標示者為準。

四十呎超高成衣櫃

外部尺寸				
長	寬	高		
40'0"	8'0"	9'6"		
12.19 m	2.44 m	2.90 m		
內部尺寸				
長	寬	高		
39'5 45/64"	7'8 19/32"	8'9 15/16"		
12.03 m	2.35 m	2.69 m		
重量限制			櫃門內徑	
總重	空櫃重	貨物淨重	寬	高
67,200 lb	9,172 lb	58,028 lb	7'-8 1/8"	8'-5 49/64"
30,480 kg	4,200 kg	26,280 kg	2.343 m	2.585 m



附註
上述資料僅供參考，實際尺寸及重量應以各櫃櫃體所標示者為準。

Corporate Office

Kun Lun Shan Zhuang Residence Area, #1945 – 5 Tai Shan Road, Qingdao Economic Development Zone. PC: 266555

Phone +86-532-86956731 Fax +86-532-86956732

www.biliinternational.com.